
PDOOR ENTRY

INTERACTIVE DIGITAL NOTICEBOARD IPNOTICEBOARD™



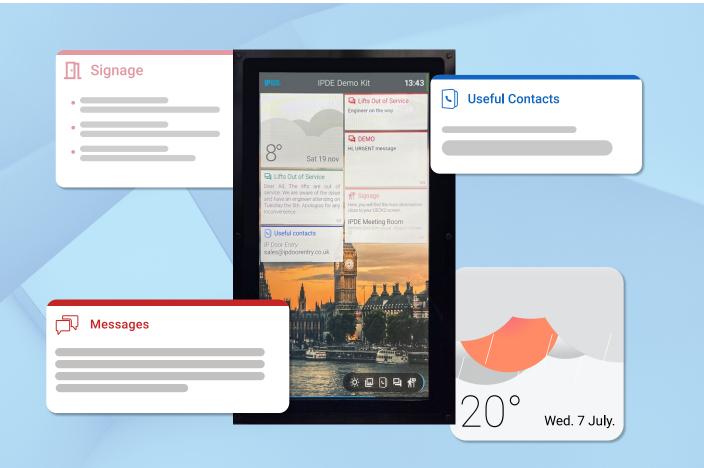


IPNOTICEBOARD[™] COMMUNICATE SMARTLY

IPNOTICEBOARD[™] is an environmentally-friendly and effective means of communicating with your residents and visitors.

It displays real-time building-specific information.

Remotely manage the display from any internet enabled device via the easy-to-use CLOUD portal.

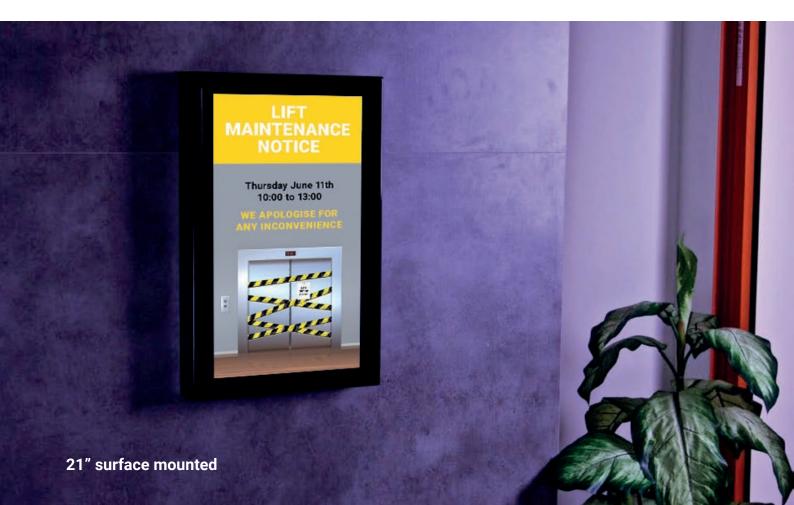

IPNOTICEBOARD[™] KEEPS EVERYONE INFORMED



Surveys

Receive feedback from your residents without going to site

	-	

Signage

Display companies located in a shared office block and provide directions to visitors



Notices

Inform residents and visitors using visuals and promotional material



Videos

Display videos

Messages



Simply display a bold message

Useful contacts

Provide everyone with easy access to important contacts



Public transport

Provide up-to-date public transport information



Weather reports Real-time weather







IPNOTICEBOARD A CHOICE OF TWO SCREEN SIZES



21" Ref: ECR21E2X



43" Ref: ECR43E1X

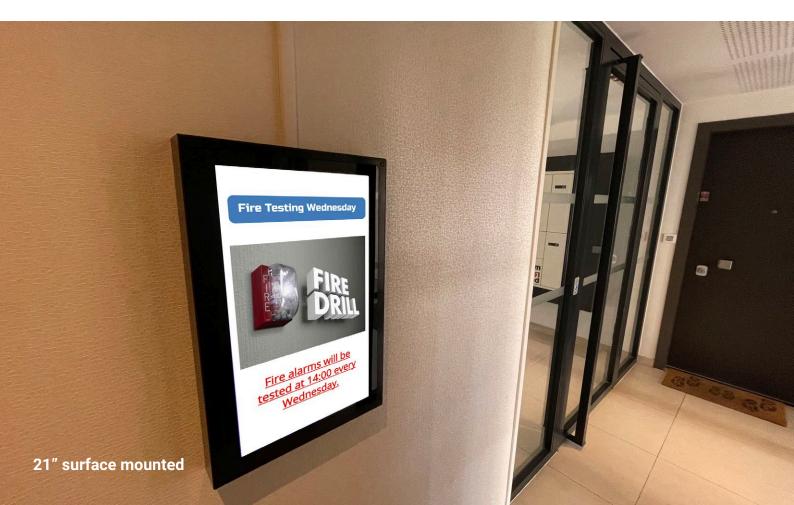


IPNOTICEBOARD INSTALLATION OPTIONS



FLUSH FIXING FRAMES SMALL / LARGE

SURFACE MOUNT Ref: S1X

FLUSH MOUNT Ref: E1X

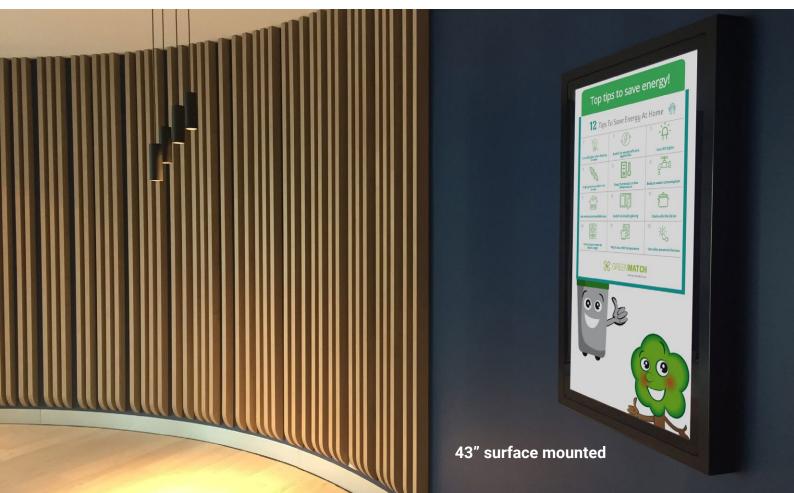

IPNOTICEBOARD REMOTE MANAGEMENT


Technology means no paper and no mess. It also means instantaneous updates with whatever you want, whenever you want – from any internet enabled device.

Simply log onto the free CLOUD portal – no software required – and display building specific information and anything else that will assist your residents and their visitors on the IPNOTICEBOARD in the entrance lobby.

There are even pre-prepared templates for you to use because we know what you need – all buildings have similar requirements.




IPNOTICEBOARD HOW OUR CUSTOMERS USE THEIR DISPLAYS













SPECIFICATIONS	Meal deal £15 Martin				
	21"	43"			
REFERENCES	ECR21E2X	ECR43E1X			
MECHANICAL CHARACTERISTICS					
Screen dimensions (HxW)	518 x 313 mm	1000 x 587 mm			
Flush dimensions (HxWxD)	543 x 350 x 60 mm	1053 x 654 x 73 mm			
Surface dimensions (HxWxD)	545 x 350 x 62 mm	1067 x 662 x 78 mm			
Mounting	Flush or surface				
Protection rating	IK6-8				
ELECTRICAL CHARACTERISTICS					
Power	220 V AC				
Consumption	Consumption 32kWh/month				
FEATURES					
Screen	Anti-vandal security glass with high-definition capacitive touch screen. Optional PVC polycarbonate reinforcement.				
Updates	Remote automatic updates.				
Connectivity	4G LTE / Ethernet RJ45. Optional built in router.				
Programming	OECKO.COM available 24/7/365 real time.				
Advanced features	Weather reports, Contact directories, Display useful information, messages and videos, Survey function, Signage (display companies present in office blocks and directions to them).				

CONNECTIVITY			ACCESSORIES	
ECR21E2X	21", NO 4G Router ONLY RJ45 (for IPGUARD DATA connection)		FIN21M	PVC polycarbonate reinforcement
ECR21R2X	21R2X 21", Integral 4G Router and RJ45		FIN21S	21" surface box
	43", NO 4G Router ONLY RJ45 (for IPGUARD DATA connection)		FIN21E	21" flush housing
ECR43E2X			FIN43S	43" surface box. Bespoke surface boxes available.
ECR43R2X	43", Integral 4G Router and RJ45		FIN43E	43" flush housing. Bespoke surface boxes available.



08000 156496 sales@ipdoorentry.co.uk www.ipdoorentry.co.uk f I ipdoorentry IP Door Entry Limited Unit DC4 Prologis Park Eastman Way Hemel Hempstead HP2 7DU