



REAL TIME



**KEY FEATURES...**

- ▶ BS316 grade stainless steel
- ▶ 90 programmable codes
- ▶ 10 Audio Help messages
- ▶ Momentary or latching relays
- ▶ Large illuminated 15.6mm dia buttons
- ▶ Braille embossed
- ▶ LED visuals
- ▶ Anti-vandal screws
- ▶ Optional integrated T25 mushroom proximity reader

**SPECIFICATIONS**

**PTI327-RSXNA**

**MECHANICAL CHARACTERISTICS**

<b>Facia dimensions (WxHxD)</b>	120 x 270 x 2.5 mm
<b>Backbox dimensions (WxHxD)</b>	95 x 245 x 45 mm
<b>Surface box dimensions (WxHxD)</b>	120 x 270 x 85 mm
<b>Weight</b>	1400 g
<b>Finish</b>	Facia 2.5mm thick BS 316 brushed stainless steel
<b>Protection rating</b>	IK09 / IP65


**ELECTRICAL CHARACTERISTICS**

<b>Power</b>	12-24V DC / 12-24V AC
<b>Consumption</b>	2W
<b>Relay</b>	2 relays 5A rated NO/NC programmable, momentary or latching
<b>Temperature</b>	Operating -25°C to 55°C / Storage -20°C to 85°C

**FEATURES**

<b>Audio HELP messages</b>	10 visitor HELP progress messages, volume adjustable
<b>Relay</b>	Programmable 0.3 secs – 99 secs, momentary or latching
<b>Capacity</b>	90 user codes, mix 3 – 8 digits / characters
<b>Calendar</b>	8 week types
<b>Free entry times</b>	Programmable via Week Type function
<b>Programming</b>	WWW.BATICONNECT.COM available 24/7/365 real time, or on-site via panel keypad

DIMENSIONS mm

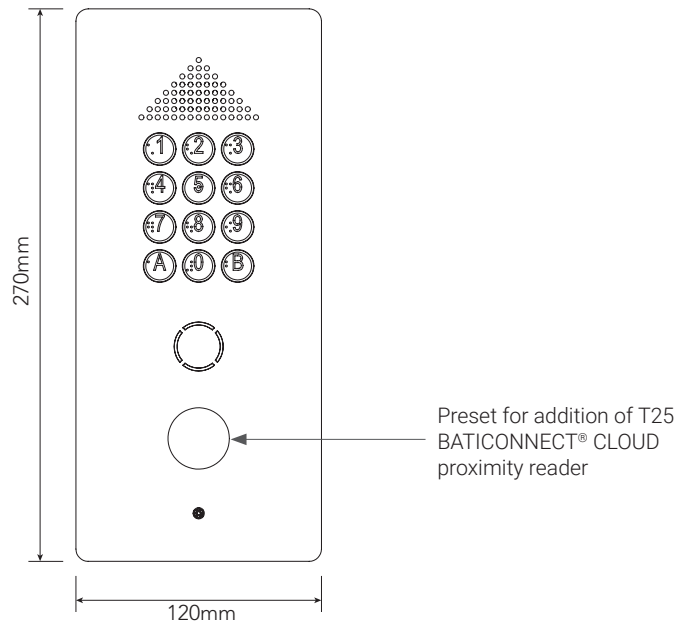

INSTALLATION

